NÁVOD K MONTÁŽI A POUŽÍVÁNÍ
STAINLESS STEEL URINAL TROUGH
in vandal-proof version


BSPZ 01

BASIC TECHNICAL INFORMATION

Width	1250 mm	1900 mm	2500 mm	3000 mm
Flushing nozzles	3	5	6	7
Outlet diameter	d 40			

Description of the stainless steel urinal trough:
BSPZ 01 is a wall-mounted urinal trough made of 2 mm thick stainless steel AISI 304, equipped with flushing nozzles along its upper part. Number of nozzles depends on the length of the trough (aprox. spacing 400 mm). The water supply to the nozzles is located approximately in the middle of the trough and is finished with stainless steel flexible hose with ¾ "nut.
Flushing control must be solved separately – recommended flushing system is COS 1 flushing control. In standard version the trough is fitted with plastic siphon hidden in the trough (bottom side of trough is not covered). On order the trough can be equipped with a stainless steel siphon, which can be freely accessed or hidden in the trough.
Version type of the trough is left or right – as per the location of water outlet (from a front view).

.

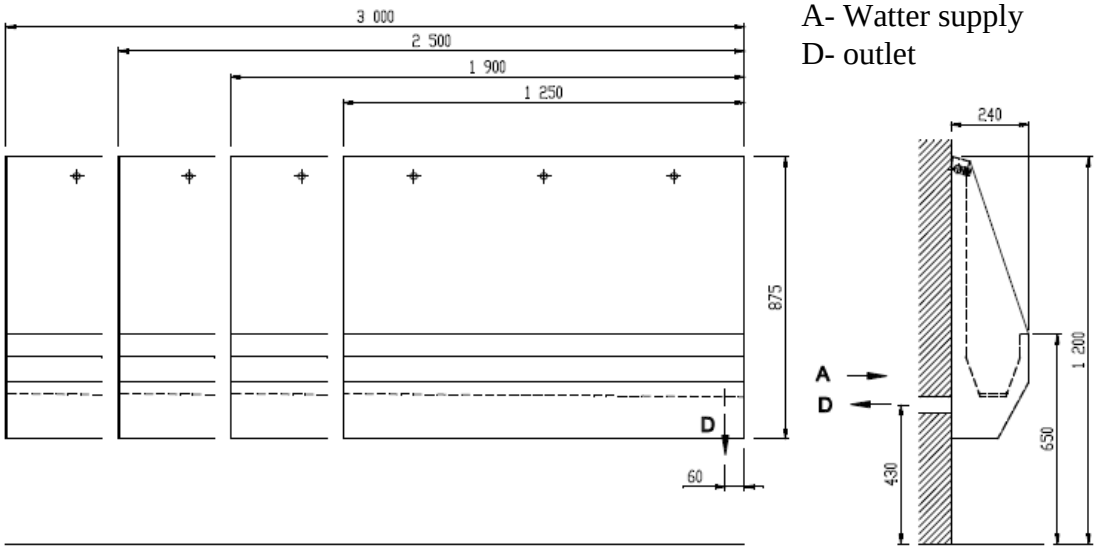

Assembly of the trough:
1. Set-up water inlet (1/2" T-part in the middle of the trough) with water supply pipe or hose finished with ½" female thread.
2. Set up the carrying bar on the wall with anchoring bolts into the joggles. Bolts and joggles supplied by producer enable fixing into the sufficiently bearing masonry wall (solid brick or concrete wall, etc.). For fixing into the other walls (cavity brick wall, etc.) it is necessary to use suitable anchoring material.
3. Fix the trough properly on the carrying bar. Fix bottom side of the trough with anchoring bolts into the joggles.
4. Finish the water supply connection – the water inlet must be set-up with a **spherical valve** enabling water flow adjustment.
5. Set-up water outlet.
6. Set the water flow rate with the spherical valve, so that the wall of the trough is washed properly but spraying water outside the trough is avoided.

Maintenance and cleaning:
BSPZ 01 is made of the stainless steel AISI 304 which is not suitable for chemically aggressive environment (e.g. public swimming pools). For cleaning do not be use detergents containing chlorine. Recommended cleaning detergents: WÜRTH – metal restorer (no. 893 121 1); metal care (no. 0893 121-K).

Note:
Flushing with water containing iron can create brown (rust) maps on the surface of trough. This is not the corrosion of material, but excluded oxides of iron on the surface..
When used in the same surrounding in which standard steel is processed, superficial corrosion can appear due to the sediments of metal particles on the bottom of the trough. It is necessary to rinse well the trough after every usage to remove this possible deposits of corrosion.

Complete delivery:
Stainless trough – 1 pc. Connecting hose ¾“ – 1 pc. Fixing bar and material – 1 set

AZP Brno s.r.o.
Sladovnická 17
620 00 Brno,Czech Republic
Tel.: + 420 545 428 911
Fax: + 420 545 428 910
GSM: + 420 602 570 068
web : www.azp-brno.com
e-mail : azp@azp.cz