



Instructions for installation and use

AUZ 06N – Stainless steel toilet including flushing cistern, for free standing

BASIC TECHNICAL INFORMATION:



Dimensions:	430 x 365 x 740 mm
Weight:	20 kg
Bearing capacity:	200 kg
Water pressure required:	1 – 6 bar
Outlet diameter:	89 mm
Water inlet:	G 1/2"
Website:	AUZ 06N

Description and intended use

- AUZ 06N is a stainless steel floor standing water-closet vandal-proof, with back waste and flushing inlet from the back side.
- The casing of the toilet is made of 1,5 mm thick stainless steel; the part for sitting is made of 2 mm thick stainless steel.
- The toilet seat is made of rigid plastic material.
- Pressure flushing system is used together with the toilet either for high and low placed water tank.

Assembly

1. Get ready the drainage system d 110 mm, (see figure)
Check the length of all connecting pieces – the length must be according to the scheme
2. Lubricate the sealing gasket with suitable lubricant
3. Connet the water inlet hose with corner valve to the inlet into the flushing tank (external thread G 1/2")
4. Open the corner valve on the water inlet into the flushing tank
5. Screw out the protecting covers of anchoring bolts (on left and right side of the toilet)
6. Place the toilet onto the outlet and threaded rods and tighten the nuts M 12.
7. Check the tightness of all connections
8. Screw back the protecting covers of anchoring bolts
9. Check the setting of water inlet valve and flushing valve
10. The stainless steel cover of flushing tank is secured with M4 screws. Together with the cover it is necessary to screw out the upper chrom-plated cover of flushing system

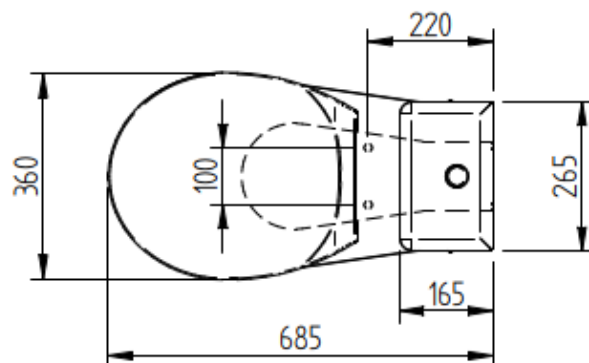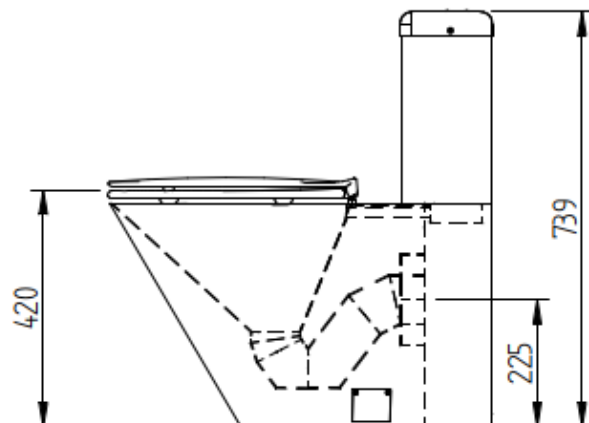

Note

- For toilets with outlet leading into the floor, set up the sewerage piping finished with 110 mm HT pipe, which may not exceed the floor level and may be max. 20 mm beneath the floor level. The middle of the HT pipe must be exactly in the middle of the hole in rear side of the bottom of toilet.



Complete delivery

- Stainless steel toilet including flushing tank 1 pc.
- Plastic seat 1 pc.
- Nut M12 with washer 2 pcs.
- Flexi hose, corner valve 1 pc.

Maintenance and cleaning

- The device was made from the stainless steel of quality corresponding with ČSN 17 240 (AISI 304) standard and, therefore, it must not be operated in chemically-aggressive environment and
- **Preparations containing chlorine must not be used for its cleaning!!**
- Cleaning agents by WÜRTH are recommended:
 - Metal renewal agent - Order No. 893 121 1
 - Stainless steel spray treatment - Order No. 0893 121 – K.
- If corrosion has already occurred, it can be removed with a cleaner INNOSOFT B 570 from the company Emergo.