



Instructions for installation and use

BSNZ 02 – Safety stainless steel toilet for free-standing

BASIC TECHNICAL INFORMATION:


Dimensions :	560 x 360 x 430 mm
Weight :	25 kg
Bearing capacity :	200 kg
Min. water flow:	70 l/min
Outlet diameter:	89 mm
Diameter of flushing piep:	34 mm – for delivered sealing gasket; up to 50 mm if other gasket will be used (inner dimension of inlet opening is 56 mm)
Weblink:	BSNZ 02

Description and intended use

- BSNZ 02 is stainless steel floor standing toilet in vandalproof version. Outlet is designed to the floor. Toilet is made from 2 mm thick material. Upper part for sitting is made stronger from 3 mm thick material. Toilet is produced without toilet seat. Toilet is designed for combination with pressure flushing system and with cistern as well.


Installation

Setting up construction

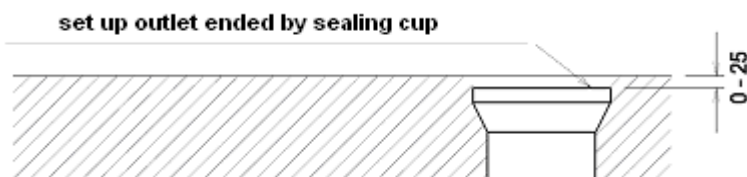

Assembly

- Set-up the sewerage d 110 mm finished with end-neck of the toilet. The end-neck must be at the floor level or up to 25 mm beneath the floor. It must not protrude over the floor.
- Place the closet on prepared outlet and mark the anchor points. These points are accessible after unscrewing the protecting covers of anchoring bolts in the lower part of the casing.
- Drill the holes for dowels d 12. Supplied dowells are intended for fixing the toilet to the concrete floor. When using another type of floor it is necessary to select the appropriate anchor elements.
- Place the toilet on the outlet and water supply pipe.
- Tighten the toilet well to the floor by means of attached screws.

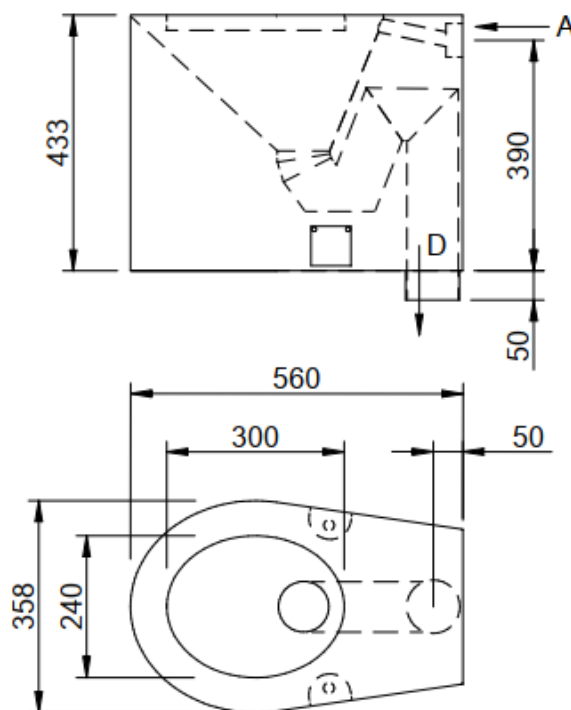




6. Screw back the protecting covers of anchoring bolts.

Complete delivery

- Stainless steel closet 1 pc.
- Sealing cap 1 pc.
- Nut M12 including washer 2 pcs.

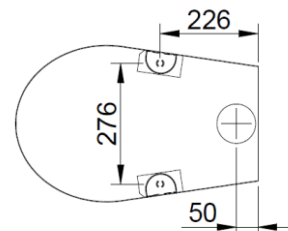

Maintenance and cleaning:

- The device was made from the stainless steel of quality corresponding with CSN 17 240 (AISI 304) standard and, therefore, it must not be operated in chemically-aggressive environment and
- **Preparations containing chlorine must not be used for its cleaning!!**
- Cleaning agents by WÜRTH are recommended:
 - Metal renewal agent - Order No. 893 121 1
 - Stainless steel spray treatment - Order No. 0893 121 – K.
- If corrosion has already occurred, it can be removed with a cleaner INNOSOFT B 570 from the company Emergo.