



Instructions for Installation and Use

ASO 04 – Automatic Shoe Dryer with Forced Airflow and Electric Heating for 12 Pairs of Shoes

BASIC TECHNICAL DATA

Supply voltage:	230 V, 50 Hz
Power input:	640 W
Air temperature:	approx. 150 °C above ambient temperature
Drying time:	minimum 2 hours (set using timer switch)
Number of shoe pairs:	12
Product website:	ASO 04

Description of the Stainless Steel Shoe Dryer

- ASO 04 is a shoe dryer with forced airflow and electric heating.
- The housing is fitted with nozzles for 12 pairs of shoes. Shoes must be placed **toe upwards** onto the nozzles. If shoes are placed toe downwards, the front part of the shoes will not dry properly.
- The air is heated by an electric heating element. Drying time depends on the type of shoes and their level of moisture, and ranges from 2 to 10 hours. When drying fewer pairs of shoes, it is advisable to cover unused nozzles.


Installation of the Shoe Dryer

Site Requirements

- Prepare a 230 V, 50 Hz power supply protected with a 10 A circuit breaker, single-phase socket 1+N+PE, compliant with the installation environment.

Mounting

1. Mount the dryer onto a non-flammable wall using screws and wall plugs.
2. The bottom edge of the dryer must be at least 100 mm above the floor level to avoid restricting air intake.
3. Connect the equipotential bonding conductor to the equipotential bonding terminal.
4. Connect the power supply – insert the 230 V, 50 Hz plug into the prepared socket. The socket may be fitted with a timer switch (daily or weekly) if required.
5. Switch on the power switch located at the bottom of the dryer. Operation is indicated by the illumination of the switch cover.

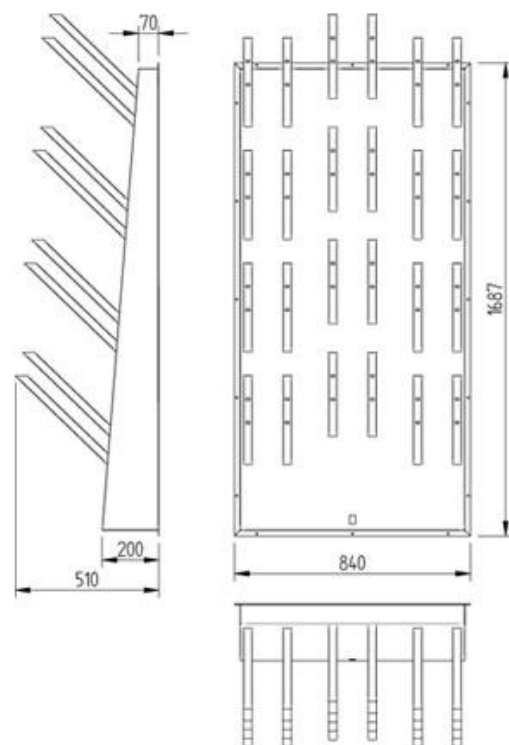



Warnings

- Before commissioning, an initial inspection of the electrical equipment must be carried out according to **ČSN 33 2000-6-61** and **ČSN 33 1500**.
- Throughout the entire service life of the dryer, the operator is required to perform regular inspections of the electrical equipment, in compliance with applicable national standards and regulations.

Caution! The ASO 04 automatic shoe dryer may only be installed in normal spaces as defined by ČSN 32 20 00-3 and ČSN 32 20 00-5-51.

Complete Delivery

- | | |
|---|-------|
| • Dryer housing | 1 pc |
| • Heating unit | 2 pcs |
| • Fan | 2 pcs |
| • Connection cable with single-phase plug | 1 pc |

Cleaning and Maintenance

- The device is made of standard steel with a Komaxit powder coating and must not be operated in chemically aggressive environments.
- **!! Do not use aggressive or abrasive cleaning agents !!**
- Cleaning should be carried out with mild, non-abrasive cleaning products suitable for coated surfaces.

Any cleaning or installation method not specified in this manual is not permitted.