Catalog sheet

AFO 05

Wall-mounted conical drinking fountain



AFO 05 is a fully clad stainless steel drinking fountain of modern design, with simple operation via a push-button valve. Water flows while it is pressed. Water is supplied through a flexible hose terminating in a corner valve. The trap consists of a flexible coupling. The flexible inlet and waste outlet allow versatile connection of the fountain.

The installation height can be chosen to suit the intended location.
The AFO 05 stainless steel drinking fountain is particularly suitable for schools, healthcare and spa facilities. It can also be used outdoors at temperatures above freezing.
The AFO 05 fountain is made of AISI 304 stainless steel. The AFO 05.CL fountain is made of AISI 316 stainless steel – suitable for environments with elevated chlorine concentrations.
For stainless steel care, we recommend Würth protective treatment (order no. 0893 121 K) and cleaner (order no. 893 121 1).

Complete delivery

- Stainless steel cladding
- Push-button valve
- Corner valve with filter
- Wall mounting bracket
- Trap
- Connecting hose
- Fixing material

Available variants

- AFO 05 Wall-mounted conical drinking fountain, AISI 304 stainless steel
- AFO 05.CL Wall-mounted conical drinking fountain, AISI 316 stainless steel

Technical details

- Water inlet G 1/2" female thread
- Water pressure 0.1 – 1 MPa, recommended 0.3 MPa
- Waste outlet d = 40 mm
- Internal bowl dimension d = 245 mm
- Overall dimensions 300 x 350 x 250 mm
- Weight 4 kg

AZP Brno s.r.o.
U Sýpky 555, CZ-664 61 Rajhradice
tel +420 545 428 911
mob +420 602 570 068
IČ 46973150 | DIČ CZ46973150
KOS v Brně – oddíl C, vložka 7425
e-mail azp@azp.cz
www.azp.cz

Construction readiness requirements

- Set-up water inlet – 1/2“ pipe as shown in the diagram
- A fine-mesh filter (100 microns) must be fitted in the water inlet to remove mechanical impurities from the water, significantly improving the reliability of the push-button valve. Damage from impurities entering the mechanism is not covered by warranty.
- Set-up waste outlet for a flexible coupling d = 40 mm

As the fountain’s water inlet and waste outlet are flexible, the connection dimensions in the drawing are recommendations only. The inlet and waste outlet may be positioned as required, within the movement range of the flexible connections and the available space behind the unit.

Diagram

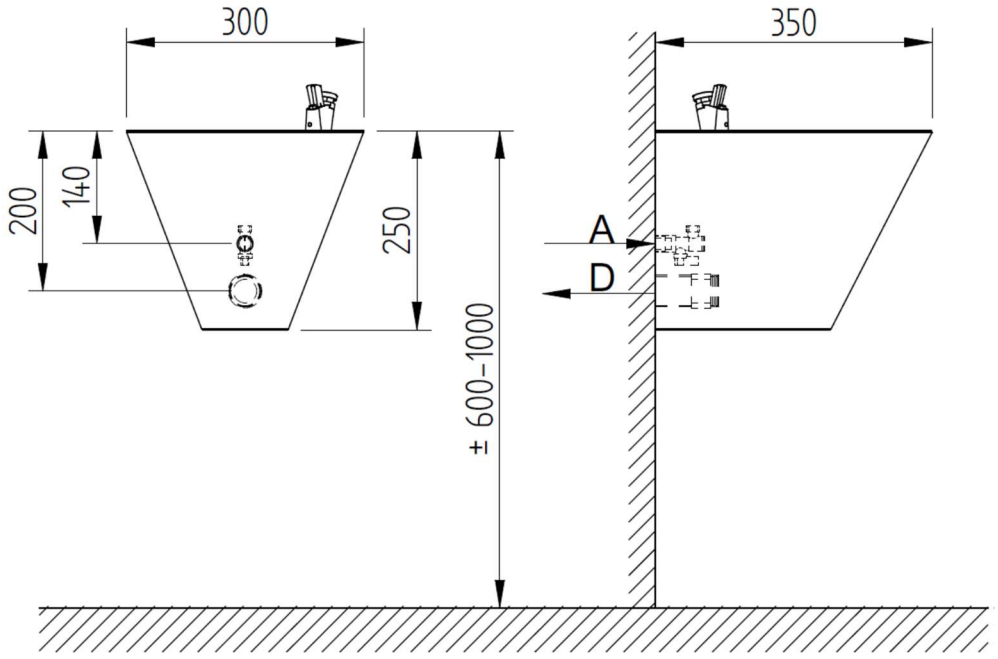

A – Water inlet pipe G 1/2"
D – Waste outlet d=40 mm

AZP Brno s.r.o.
U Sýpky 555, CZ-664 61 Rajhradice
tel +420 545 428 911
mob +420 602 570 068
IČ 46973150 | DIČ CZ46973150
KOS v Brně – oddíl C, vložka 7425
e-mail azp@azp.cz
www.azp.cz