



Catalog sheet

AUZ 01 INV

Stainless steel wall mounted toilet for the physically disabled

The **AUZ 01 INV** is a wall mounted stainless steel toilet with a matte finish, designed for people with physical disabilities. This stainless steel model is based on the standard AUZ 01 but has been extended to comply with regulations for products intended for the physically disabled. The toilet comes with a grey seat and lid made of hardened plastic. The assembly holes for the AUZ 01 match those of a standard ceramic toilet.

Both toilet models include a removable backrest recommended by the League for Wheelchair Users' Rights.

The unit can be assembled as a complete set with the AUZ 3 INV automatic distant flushing system and the KZ 1 cantilever, or with the automatic flushing system AUZ 5-II with in-wall toilet module.

The toilet casing is made of 1.5 mm thick material. Due to its resistance to damage, the AUZ 01 INV is intended primarily for social facilities with expected high intensive use, such as highway rest areas, pubs, etc., where easy maintenance of hygiene is required - using automatic flushers, e.g. AUZ 3 INV, with maximum water saving. The toilet is also produced in an anti vandal version made of thicker material (up to 4 mm) and without a plastic seat under the code BSNZ 01 INV.

You can find other variants of stainless steel toilets in the stainless steel toilets or stainless steel security toilets section.

The toilets are made of stainless steel of class ČSN 17240 (AISI 304). Other materials on request (e.g. AISI 316). For the treatment of stainless steel products, we recommend using Würth detergents – material preservation (order no. 0893 121 K), material cleaning (order no. 893 121 1).

Complete delivery

- Stainless steel WC
- Plastic seat
- Anchoring material
- Stainless steel backrest





Available variants

- AUZ 01 INV Stainless steel wall-mounted toilet for physically disabled
- AUZ 01 INV.CS Stainless steel wall-mounted toilet for physically disabled incl. the black plastic seat


Technical details

- Water inlet d = 34 - 50 mm
- Min. water flow capacity 70 l/min
- Outlet d = 90 mm
- Required spacing between bolts 180 mm
- Weight 22 kg

Construction readiness requirements

- Set-up outlet d = 110 mm with rubber sleeve for pipe d = 90 mm
- Set-up water inlet according to the diagram d = 34 - 50 mm and chosen sealing.
- Set-up the cantilever or other system for hanging the WC pan

Diagram

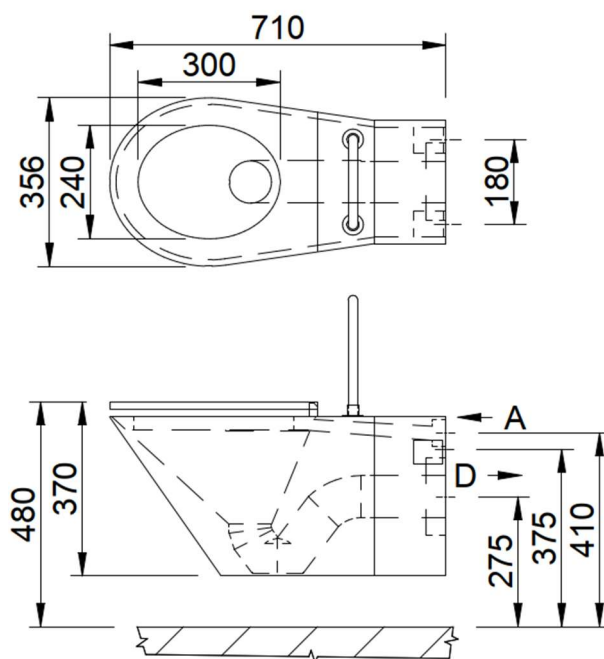

A – Water inlet

D – Outlet