



Catalog sheet

AUZ 02

Stainless steel freestanding toilet, with hardened seat

AUZ 02 is a stainless steel toilet in a matte finish. It includes a grey seat with a lid made of hardened plastic to increase user comfort. AUZ 02 is designed to be placed on the floor against a wall or in a space and is suitable wherever it is not possible to mount a regular toilet to the wall, for example due to a thin load-bearing wall. The standard version of AUZ 02 is with outlet directed downwards (can be used as a hygienic replacement for Turkish toilets), but upon agreement it is possible to direct the outlet elsewhere (also from the side). The toilet is suitable to be supplemented with an automatic flushing system of pressurized water AUZ 3, an automatic flushing system with a piezo button AUZ 3.P (or an antivandal flushing system BSAZ 01) or any flushing system with a tank.

The toilet is resistant to damage and is intended primarily for social facilities with demanding operations, such as highway rest areas, pubs, etc., where easy hygiene maintenance is required. We also produce this toilet in a version for the physically disabled with code AUZ 02 INV.

The casing is made of 1.5 mm thick stainless steel sheet, the upper supporting part is made of 2 mm thick sheet. The toilet is also produced in an anti vandal version intended for the most demanding operations (BSNZ 02) from 2 or 3 mm thick sheet, without toilet seat and with ground, rounded edges. More about this version can be found in the security section.

You can find other variants of stainless steel toilets in the stainless steel toilets or stainless steel security toilets section.

The toilets are made of stainless steel of class ČSN 17240 (AISI 304). Other materials on request (e.g. AISI 316). For the treatment of stainless steel products, we recommend using Würth detergents – material preservation (order no. 0893 121 K), material cleaning (order no. 893 121 1).





Complete delivery

- Stainless steel WC
- Plastic seat
- Anchoring material

Available variants

- AUZ 02 Stainles steel freestanding toilet, including grey hardened seat
- AUZ 02.CS Stainles steel freestanding toilet, including black hardened seat


Technical details

- Water inlet d = 34 - 50 mm
- Min. water flow capacity 70 l/min
- Outlet d = 90 mm
- Weight 23 kg

Construction readiness requirements

- Set-up outlet into the floor accordingly the diagram d = 110 mm with rubber sleeve for pipe d = 90 mm.
- Set-up water inlet according to the diagram d = 34 - 50 mm and chosen sealing.

Diagram

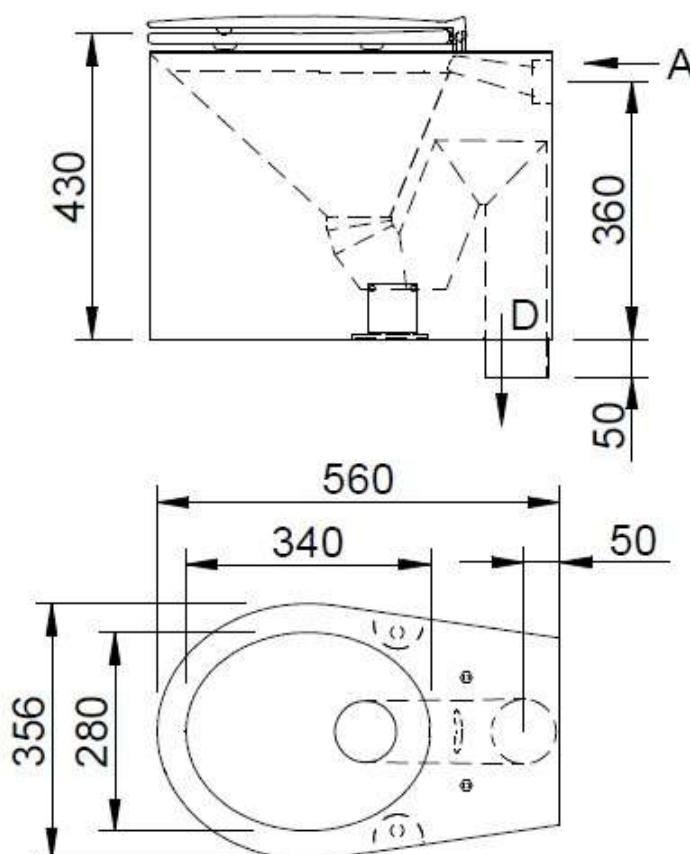

A – Water inlet

D – Outlet