



Catalog sheet

AUZ 03 INV

Stainless steel wallmounted toilet for disabled – antivandal

AUZ 03 INV is a wallmounted stainless steel toilet in a matte finish designed for the physically disabled. The stainless steel toilet is based on the standard AUZ 03, which is extended in its size to meet the regulation for products intended for the physically disabled. The toilet is in antivandal version without a seat so that it is impossible to damage anything on it. The mounting holes of the AUZ 03 INV are the same as those of a standard ceramic toilet.

The toilet includes a removable backrest recommended by the League for Wheelchair Users' Rights.

It can be assembled as a complete unit with the AUZ 3 INV automatic distant flushing system and the KZ 1 cantilever, or with the AUZ 5-II flushing system in in-wall module.

The toilet casing is made of 1.5 mm thick material. Thanks to its resistance to damage, the AUZ 03 INV is designed primarily for social facilities with demanding operations—such as highway rest areas, pubs, etc. where easy hygiene maintenance is required.

The toilet is also manufactured in an antivandal version made of thicker material (2–4 mm) code BSNZ 01 INV.

Other variants of stainless steel toilets available in the stainless steel toilets or stainless steel security toilets section.

The toilets are made of stainless steel of class ČSN 17240 (AISI 304). Other materials on request (e.g. AISI 316).

For the treatment of stainless steel products, we recommend using Würth detergents – material preservation (order no. 0893 121 K), material cleaning (order no. 893 121 1).



Complete delivery

- Stainless steel WC
- Anchoring material

Available variants

- AUZ 03 INV Antivandal stainless steel wallmounted toilet for physically disabled

Technical details


- Water inlet d = 34 - 50 mm
- Min. water flow capacity 70 l/min
- Outlet d = 90 mm
- Weight 23 kg



Construction readiness requirements

- Set-up outlet according to the diagram $d = 110$ mm with rubber sleeve for pipe $d = 90$ mm
- Set-up water inlet according to the diagram $d = 34 - 50$ mm and chosen sealing
- Set-up the cantilever or other system for hanging the WC pan

Diagram

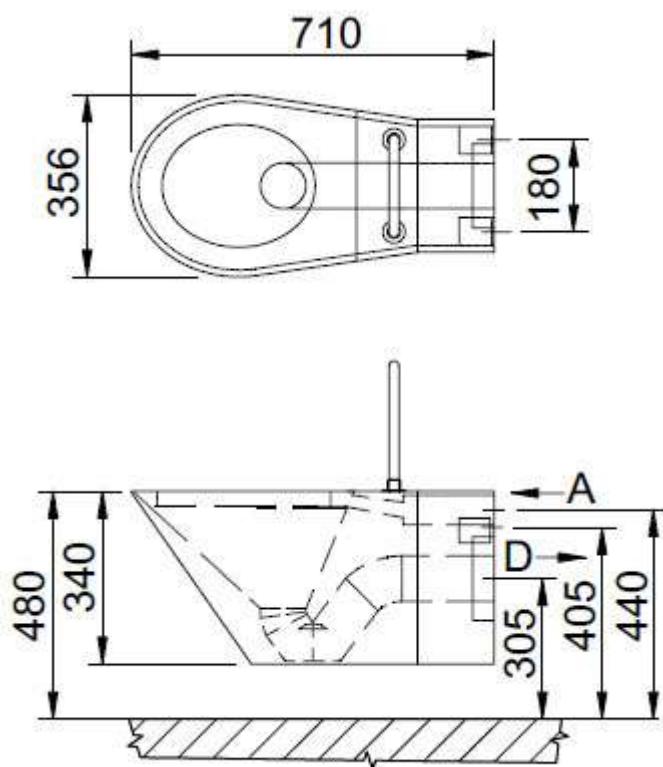

A – Water inlet

D - Outlet