



Catalog sheet

AUZ 06

Stainless steel free standing toilet

The **AUZ 06** is a stainless steel toilet with a matte finish. To enhance user comfort, it includes a grey seat and lid made of hardened plastic. The AUZ 06 is designed to be placed on the floor against a wall or in a space and is suitable wherever it is not possible to mount a regular toilet to the wall, for example due to a thin load-bearing wall. The standard model features outlet directed into the wall. A version with outlet directed to the floor is available upon request - this can serve as a hygienic alternative to Turkish toilets. It is advisable to equip stainless steel toilet with the AUZ 3 automatic flushing system with pressurized water, the AUZ 3.P automatic flushing system with piezo button (or the antivandal BSAZ 01 flushing system), or any standard flushing system with a tank.

It is also available as a complete set with a stainless steel tank—the AUZ 06N.

Thanks to its resistance to damage, the toilet is designed primarily for social facilities with demanding operations such as highway rest areas, pubs, etc. where easy hygiene maintenance is required.

The casing is made of 1.5 mm thick stainless steel sheet, the upper load-bearing section is made of 2 mm sheet metal. Other variants of stainless steel toilets available in the stainless steel toilets or stainless steel security toilets section. The toilets are made of stainless steel of class ČSN 17240 (AISI 304). Other materials on request (e.g. AISI 316).



Complete delivery

- Stainless steel WC
- Plastic seat
- Anchoring material

Available variants

- | | |
|-------------|--|
| • AUZ 06 | stainless steel free standing toilet with grey plastic seat |
| • AUZ 06.CS | stainless steel free standing toilet with black plastic seat |

Technical details


- | | |
|----------------------------|----------------|
| • Water inlet | d = 34 - 50 mm |
| • Min. water flow capacity | 70 l/min |
| • Outlet | d = 90 mm |
| • Weight | 23 kg |



Construction readiness requirements

- Set-up outlet according to diagram d = 110 mm with rubber sleeve for pipe d = 90 mm.
- Set-up water inlet according to the diagram d = 34 - 50 mm and chosen sealing.
- **In case of combination with automatic flushing AUZ 3 it is also needed:**
 - Set-up alcove for installation casket
 - Set-up cable for power supply – 12 V, 50 Hz from source of power supply ZAC

Diagram

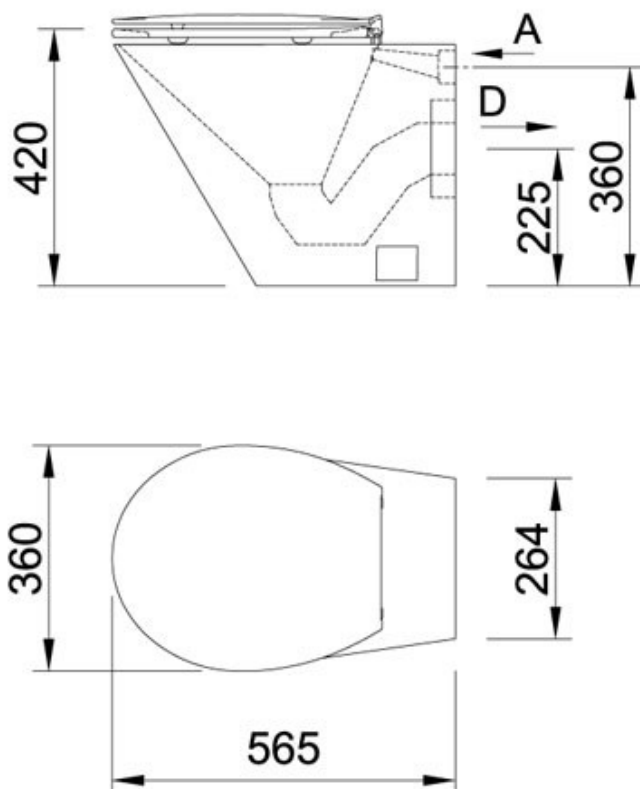

A – Water inlet

D - Outlet