



Catalog sheet

AUZ 3P

Piezo-controlled WC flushing system

The **AUZ 3P** is pressure flushing system activated by a piezo button. The electronic controls allow the adjustment of the flushing time as well as a mandatory pause after two flushes—preventing intentional repeated flushing and the resulting water waste. The duration of this mandatory pause can be set by the administrator. It can even be set to a zero - effectively disabling the pause.

The AUZ 3P flushing system can be used for all types of toilet bowls. It's also possible to pair this flushing system with the antivandal stainless steel toilets. The most suitable option is a wall-mounted toilet mounted on the KZ 1 cantilever. This setup offers a high aesthetic level and makes cleaning the toilet easy. The KZ 1 cantilever must be ordered separately.



The AUZ 3 automatic flushing system is designed for social facilities where hygiene needs to be maintained while saving as much water as possible.

For the treatment of stainless steel products, we recommend using Würth detergents – material preservation (order no. 0893 121 K), material cleaning (order no. 893 121 1).

Complete delivery

- Installation casket
- Inlet bolting
- Outlet pipe
- Stainless steel casing with electronics cabinet
- Solenoid valve
- Anchoring distance frame
- Covering metal assembly plate
- small assembly material

Available variants

- AUZ 3P Piezo-controlled WC flushing system 12 V, 50 Hz




Technical details

- Water inlet G 3/4" (1")
- Water pressure 0,3 – 1,0 MPa
- Adjustable flushing time 1 – 20 s
- Power supply 12 V, 50 Hz
- Power input 6 VA
- Source of power supply ZAC 1/20 (max. 3 x AUZ 3P)
ZAC 1/36L (max. 6 x AUZ 3P)
ZAC 1/50 1/50 (max. 8 x AUZ 3P)
- Weight 1,7 kg

Construction readiness requirements

- Set-up water supply with a minimum water flow of 70 l/min as per picture (with a filter)
- Set-up alcove 150x150x100 mm for installation casket
- Set-up cable for power supply – 12 V, 50 Hz from source of power supply ZAC
- Set-up water inlet to toilet bowl - pipe d = 34 mm

Diagram

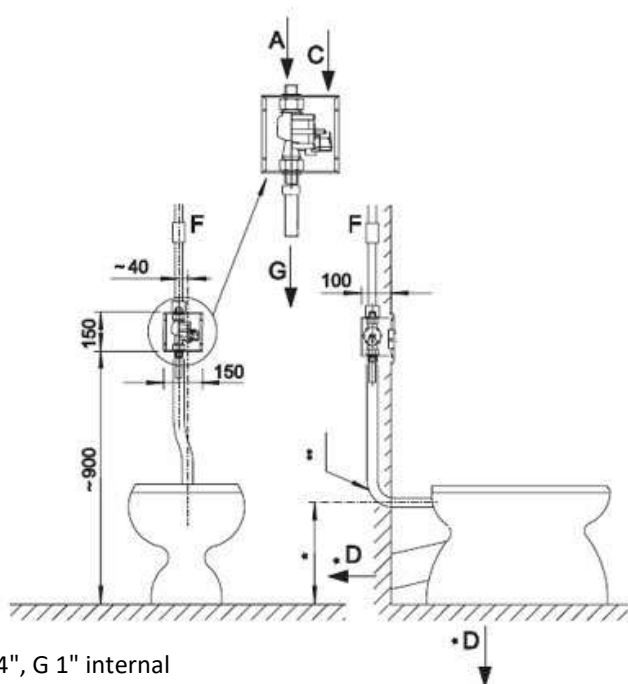

A – Water inlet pipe G 3/4", G 1" internal

C – Power supply cable CYKY 2A x 1,5

D – Water outlet

E – Zone of scanning

F – Filter

G – Water inlet into toilet trubka d = 34 mm

* - According to type of toilet

** - Arch, not elbow