



Catalog sheet

AUZ 5-II

Automatic flushing system for WC in chrome-plated cover, including the wall module

AUZ 5 is an automatic flushing system for WC concealed in a wall toilet module with chrome-plated cover. The system is designed for wallmounted closets with inlet and outlet spacing of 135 mm and with spacing of anchoring screws of either 180 or 230 mm.

A photocell sensor reacts after a person leaves the space in front of the toilet and activates the flushing system. The manual flushing is concurrently preserved. After 24 hours inactivity the closet flushes itself.

Construction of the cantilever assures the distribution of the load to the floor and wall. This allows the fixing of the wallmounted closet to walls with a lower load capacity. For fastening, simply recessing it into the wall or constructing a facing wall is sufficient.

Cantilever is suitable for application into plaster slabs and is intended for social facilities, where the user's comfort and perfect hygiene maintenance at maximum water savings is required.



Complete delivery

- Wall module
- Front control button with integrated electronics
- Solenoid valve with hoses
- Flushing system
- Small assembly material

Available variants

- AUZ 5 - II Automatic flushing system for WC in chrome-plated cover, including the wall module

Technical details


- Sensor radius automatically
- Water inlet G 1/2"
- Water pressure 0,1 - 1,0 MPa
- Outlet d = 110 mm
- Power supply 12 V, 50 Hz
- Power consumption in standby mode 1 VA, when flushing 6 VA
- Source of power supply ZAC 1/20 (max. 3x AUZ 5 - II)
ZAC 1/50 (max. 8x AUZ 5 - II)
ZAC 1/36L (max. 6x AUZ 5 - II)
- Weight 15 kg



Construction readiness requirements

- Set-up water inlet, pipe 1/2" – as per diagram
- Set-up outlet d = 110 mm
- Set-up cable for power supply – 12 V, 50 Hz from source of power supply ZAC

Diagram

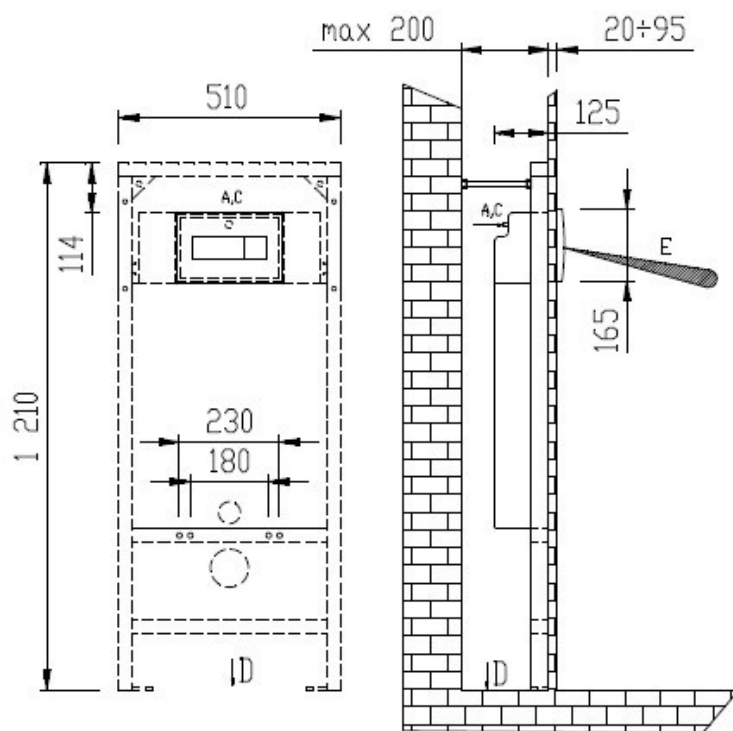

A – Water inlet G 1/2"

C - El. supply cable CYKY 2A x 1,5

D - Outlet (d = 110 mm)

E – Scanning zone