



Catalog sheet

BSNZ 01

Safety stainless steel wallmounted toilet

The **BSNZ 01** is a wallmounted stainless steel toilet with a matte finish. Its mounting holes correspond to those of a standard ceramic toilet.

It can be installed as a complete unit with the BSAZ 01 automatic safety flushing system and the KZ 1 cantilever, or with the BSAZ 5 mechanical stainless steel antivandal flushing system within in-wall module.

Due to its damage resistance, the BSNZ 01 is designed primarily for the modernization of prisons, diagnostic centers, detention cells, and similar facilities—offering maximum water savings when used with the BSAZ 01 flushing system.



You can find other variants of toilets in the stainless steel toilets or stainless steel security toilets section. The toilets are made of stainless steel of class ČSN 17240 (AISI 304). Other materials on request (e.g. AISI 316). For the treatment of stainless steel products, we recommend using Würth detergents – material preservation (order no. 0893 121 K), material cleaning (order no. 893 121 1).

Complete delivery

- Stainless steel WC
- Anchoring material

Available variants

- BSNZ 01 Safety stainless steel wallmounted toilet

Technical details


- Water inlet d= 34-50 mm
- Min. water flow capacity 70 l/min
- Outlet d = 90 mm
- Required spacing between bolts 180 mm
- Weight 24 kg

Construction readiness requirements

- Set-up water inlet d = 34-50 mm and chosen sealing
- Set-up outlet d = 90 mm as per diagram
- Set-up the cantilever or other system for hanging the closet



Diagram

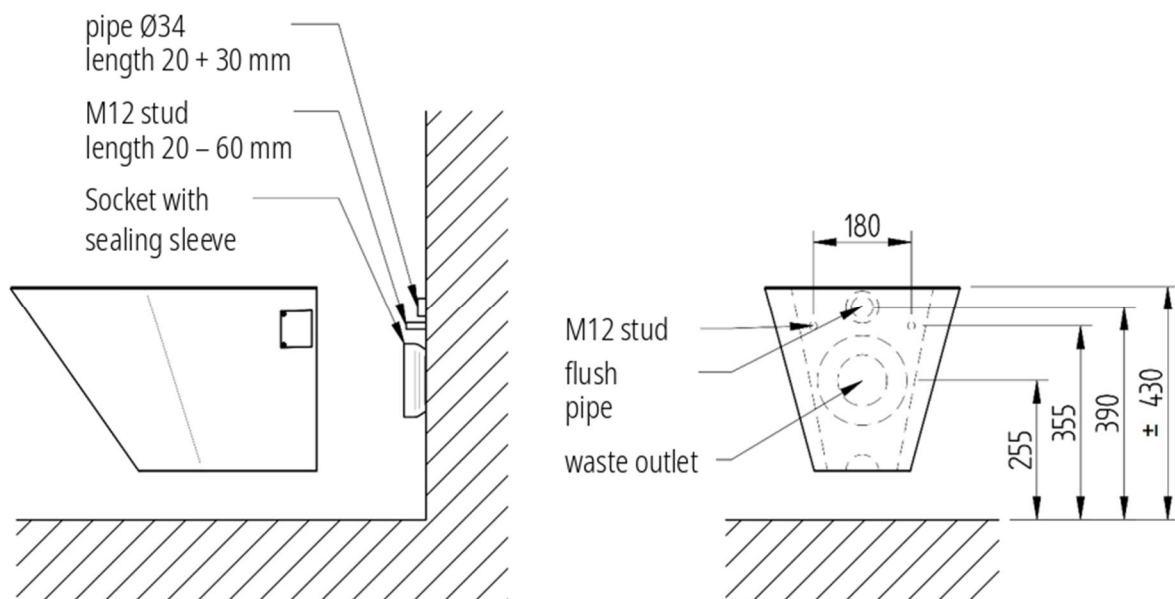

The dimensions shown in the image apply to a top-edge height of 430 mm from the floor. Provided the spacing between them is maintained, the top-edge height can be adjusted as needed—for example, for individuals with reduced mobility.