



Catalog sheet

BSNZ 02

Safety stainless steel freestanding toilet

BSNZ 02 is a antivandal stainless steel freestanding toilet suitable for placement against a wall or in a space designed for the most demanding environments. Freestanding toilet is suitable wherever it is not possible to attach a regular toilet to the side wall, for example due to a thin load-bearing wall.

The outlet is directed downwards by default (it can serve as a hygienic alternative to Turkish toilets), though a back directed outlet (into the wall) is available upon request. The casing is made of 2 mm thick stainless steel sheet, while the load-bearing top section uses 3 mm thick sheet metal. The edges of the top section are significantly rounded to enhance seating comfort.

It can be combined with the BSAZ 01 automatic safety flushing system and the KZ 1 cantilever.



You can find other variants of toilets in the stainless steel toilets or stainless steel security toilets section. The toilets are made of stainless steel of class ČSN 17240 (AISI 304). Other materials on request (e.g. AISI 316). For the treatment of stainless steel products, we recommend using Würth detergents – material preservation (order no. 0893 121 K), material cleaning (order no. 893 121 1).

Complete delivery

- Stainless steel WC
- Anchoring material

Available variants

- BSNZ 02 Safety stainless steel freestanding toilet

Technical details


- | | |
|----------------------------|-------------|
| • Water inlet | d= 34-50 mm |
| • Min. water flow capacity | 70 l/min |
| • Outlet | d = 90 mm |
| • Weight | 23 kg |

Construction readiness requirements

- Set-up outlet directed downwards d = 110 mm with rubber sleeve for pipe d = 90 mm.
- Set-up water inlet according to diagram d = 34-50 mm and chosen sealing
- Set-up alcove for installation casket (only for AUZ 3)
- Set-up cable for power supply – 12 V, 50 Hz from source of power supply ZAC (only for AUZ 3)



Diagram

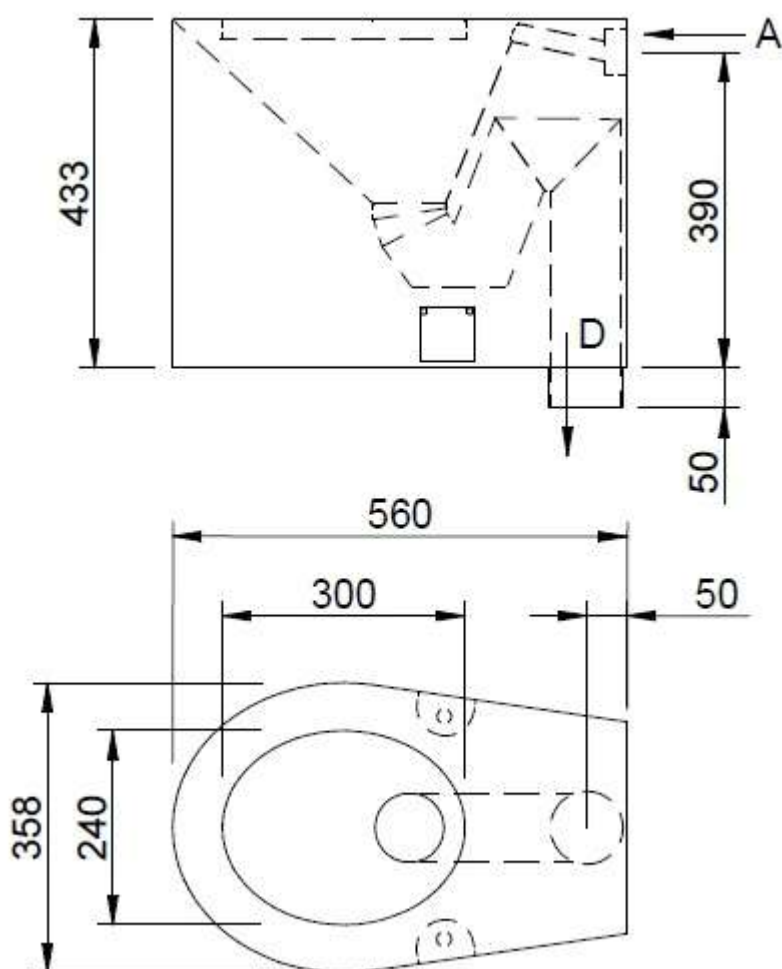

A – Water inlet

D - Outlet d = 90 mm