Catalog sheet

BSPZ 01

Safety stainless steel urinal trough – Wall-mounted



BSPZ 01 is a wall-mounted safety stainless steel urinal trough designed for sanitary facilities in spaces with a high risk of intentional damage. It is suitable, for example, for sanitary facilities in prisons, diagnostic centers for troubled youth, etc. The trough is standardly offered in stainless steel with a thickness of 2 mm. At the customer's request, the material thickness can be increased up to 3 mm. The matte surface finish is achieved by shot blasting. This treated surface is more suitable in terms of hygiene maintenance. For flushing the trough, a time-controlled COS 2 flushing system is recommended. The trough is typically designed with a drain on the right side (when viewed from the front). Custom-made orders with a left-side drain are also possible (must be specified when ordering).

Complete delivery

- Stainless steel urinal trough
- Siphon d = 40
- Urinal trough mounting strip
- Small assembly material

Available variants

• BSPZ 01.1	Safety stainless steel urinal trough 1250 mm, wall-mounted
• BSPZ 01.2	Safety stainless steel urinal trough 1900 mm, wall-mounted
• BSPZ 01.3	Safety stainless steel urinal trough 2500 mm, wall-mounted
• BSPZ 01.4	Safety stainless steel urinal trough 2995 mm, wall-mounted

Technical details


• Water inlet	G 1/2“
• Water outlet	d = 40 mm
• Weight	45 – 110 kg according to type
• Sheet thickness	2 mm
• Material	AISI 304

Construction readiness requirements

- Set up water inlet according to diagram
- Set up water outlet d = 40 mm

AZP Brno s.r.o.
U Sýpky 555, CZ-664 61 Rajhradice
tel +420 545 428 911
mob +420 602 570 068
IČ 46973150 | DIČ CZ46973150
KOS v Brně – oddíl C, vložka 7425
e-mail azp@azp.cz
www.azp.cz

Diagram

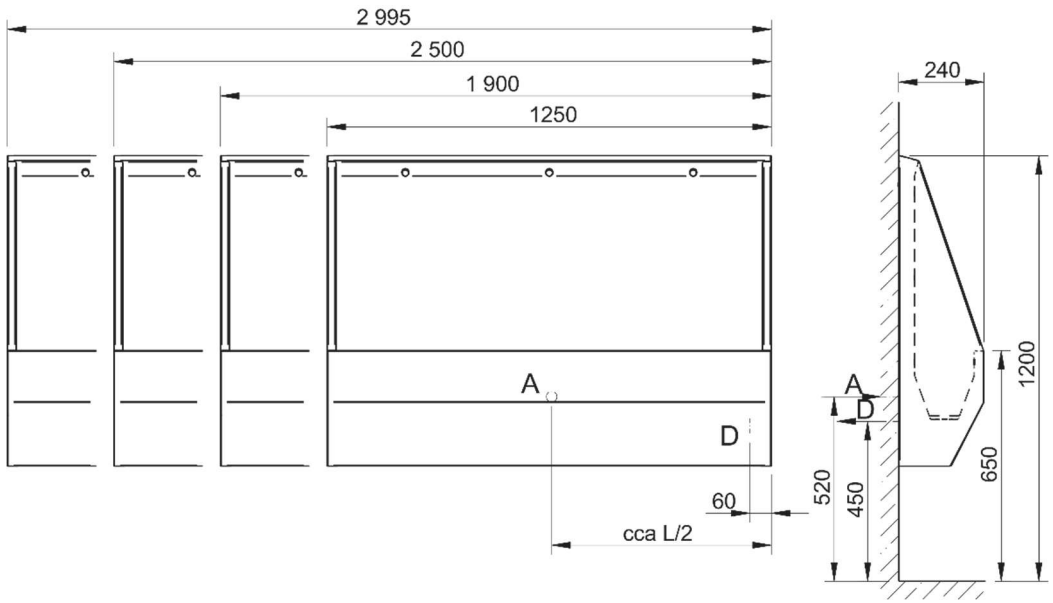

A – Water inlet G 1/2" internal
D – Water outlet

AZP Brno s.r.o.
U Sýpky 555, CZ-664 61 Rajhradice
tel +420 545 428 911
mob +420 602 570 068
IČ 46973150 | DIČ CZ46973150
KOS v Brně – oddíl C, vložka 7425
e-mail azp@azp.cz
www.azp.cz