Catalog sheet

BSPZ 02

Safety stainless steel urinal trough – Built-in



BSPZ 02 is a sefety stainless steel urinal trough designed to be installed into the wall and floor. The trough is intended for sanitary facilities in spaces with a higher risk of intentional damage. It is suitable, for example, for sanitary facilities in prisons, diagnostic institutions for troubled youth, etc.
The trough is standardly offered in 2 mm thick stainless steel. At the customer's request, the material thickness can be increased up to 3 mm. A matte surface finish is achieved by ballotine blasting. This treated surface is more suitable in terms of maintaining cleanliness.
Time-controlled COS flushing systém is recommended for flushing the trough. The trough is typically supplied with the drain on the right (when viewed from the front). Custom-made orders with a left-side drain are also possible (must be specified when ordering).

Complete delivery

- Stainless steel urinal trough
- Small assembly material

Available variants

• BSPZ 02.1	Safety stainless steel urinal trough 1250 mm, built-in
• BSPZ 02.2	Safety stainless steel urinal trough 1900 mm, built-in
• BSPZ 02.3	Safety stainless steel urinal trough 2500 mm, built-in
• BSPZ 02.4	Safety stainless steel urinal trough 2995 mm, built-in

Technical details


• Water inlet	G 1/2“
• Water outlet	d = 50 mm
• Weight	40 - 100 kg dle typu
• Sheet thickness	2 mm
• Material	AISI 304

Construction readiness requirements

- Set up water inlet according to diagram
- Set up water outlet d = 50 mm.

AZP Brno s.r.o.
U Sýpky 555, CZ-664 61 Rajhradice
tel +420 545 428 911
mob +420 602 570 068
IČ 46973150 | DIČ CZ46973150
KOS v Brně – oddíl C, vložka 7425
e-mail azp@azp.cz
www.azp.cz

Diagram

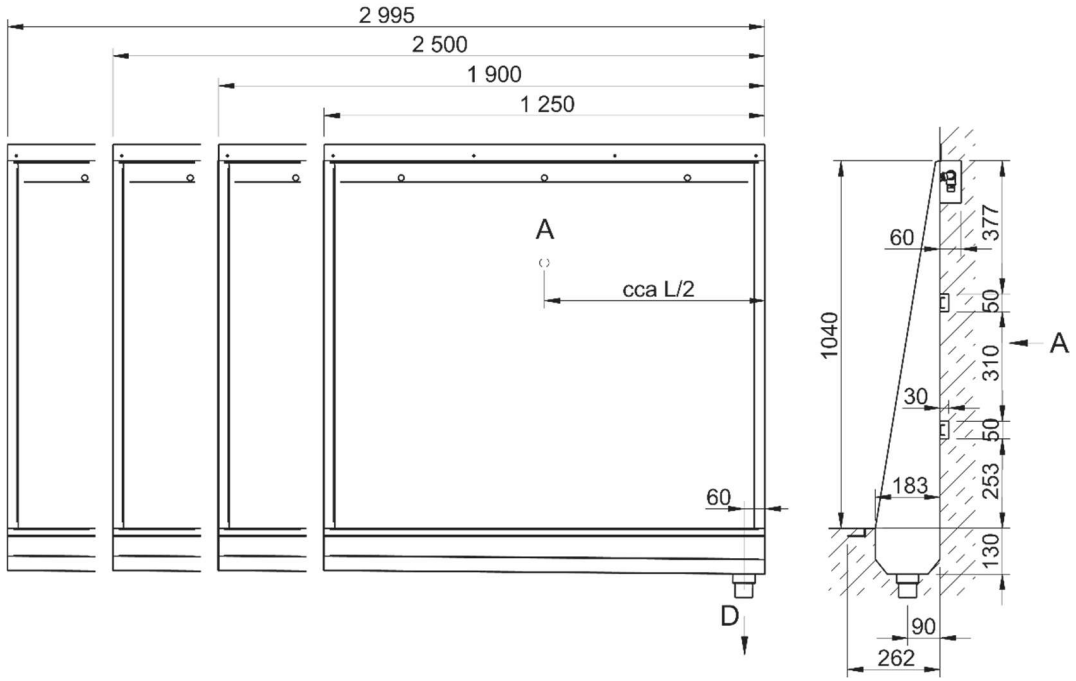

A – Water inlet
D – Water outlet