



Catalog sheet

KZ 1

Cantilever for wallmounted WC

The KZ 1 cantilever is designed to suspend a toilet bowl from load-bearing studs. Its design ensures the distribution of the load onto the floor and masonry, thereby enabling the installation of a wallmounted model even on walls with lower load-bearing capacity.

Construction KZ 1 enables:

- hanging wallmounted toilets with spacing of assembly screws 180 and 230 mm
- setting of the sitting height in the range of 390 – 490 mm. Which means that it is suitable for standard use and as well as for physically disabled
- outflow pipe diameter 90 – 120 mm
- adjustment of the spacing between the inlet and outflow pipe from 135 to 175 mm

Cantilevers are not suitable for mounting onto a plaster slabs. It is possible to fix the cantilever by notching or by using a frontal brick walling.

Complete delivery

- cantilever
- screws
- wall plugs


Available variants

- KZ 1 cantilever for wallmounted WC





Diagram

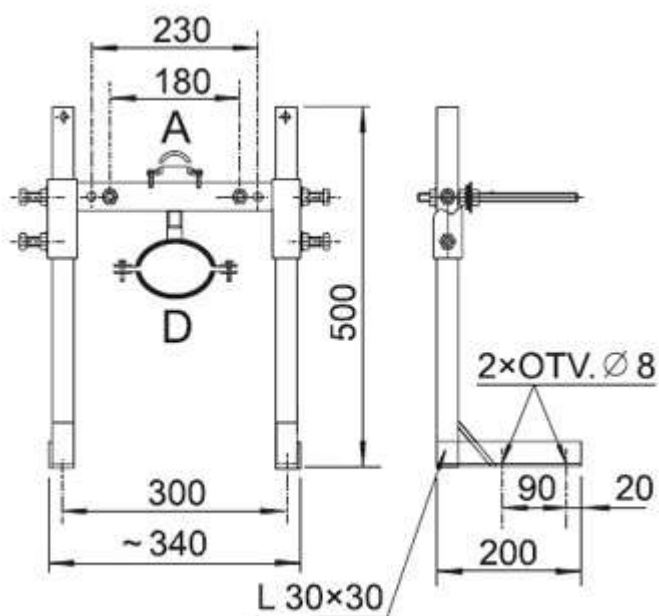

A – water inlet

D - outlet