



Catalog sheet

KZS 1

Plaster board cantilever – for wallmounted toilet installation

The **KZS 1** cantilever is designed for mounting a toilet onto a drywall partition. Its design ensures that the load is distributed to both the floor and the load-bearing steel profiles of the drywall structure. The spacing between these profiles can range from 410 to 550 mm.


Construkction KZS 1 enables:

- use for wallmounted toilets with mounting bolt spacing of 180 and 230 mm, a distance of 135 mm between the water inlet and outlet, and a vertical distance of 100 mm between the mounting bolts and outlet
- adjustment of seat height from 380 to 510 mm, i.e., suitable for both standard use and use by physically disabled
- use of outflow pipe $d = 110$ mm

Available variants

- KZS 1 Plaster board cantilever – for wallmounted toilet installation

Diagram

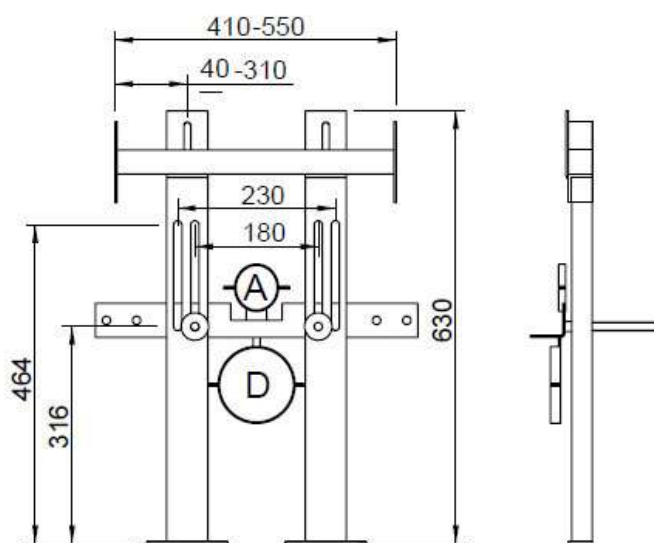

A – space for water inlet

D – space for outlet