Catalog sheet

ZP 02

Built-in stainless steel urinal trough



ZP 02 are stainless steel urinal troughs in various widths designed for social facilities with a higher risk of damage. ZP 02 is a built-in variant of the trough. The standard version includes water distribution system and durable anti-vandal stainless steel nozzles. Time-controlled flushing COS 2 is recommended for flushing the trough. It is also possible to supply a different type of flushing system upon request - e.g. sensor flushing.

The troughs are manufactured in 4 basic standard lengths. As a standard, the trough is designed with waste on the right (when viewed from the front). It can be also be supplied with waste on the left (must be specified in the order). Custom-made, also available on the left (must be specified in the order).

The trough is made of ČSN 17240 (AISI 304) material with a thickness of 1.5 mm. For heavy-duty operations, we offer a variant made of 2 mm sheet metal-BSPZ 02 in the Safety Section). On request, it is possible to make a trough from another material (e.g. AISI 316).

For the treatment of stainless steel products, we recommend using Würth products – preservation (order no. 0893 121 K), cleaning (order no. 893 121 1).

Complete delivery

- Stainless steel trough with rinsing and water inlet
- Small assembly material

Available variants

• ZP 02.1	Built-in stainless steel urinal trough 1250 mm
• ZP 02.2	Built-in stainless steel urinal trough 1900 mm
• ZP 02.3	Built-in stainless steel urinal trough 2500 mm
• ZP 02.4	Built-in stainless steel urinal trough 2995 mm

Technical details

• Water inlet	G 1/2“
• Water outlet	výtokové hrdlo d = 50 mm (bez zápachové uzávěry) u ZP 02
• Weight	according to type
• Sheet thickness	1,5 mm

Construction readiness requirements

- Set up water inlet according to diagram
- Set up water outlet d = 50 mm

Diagram

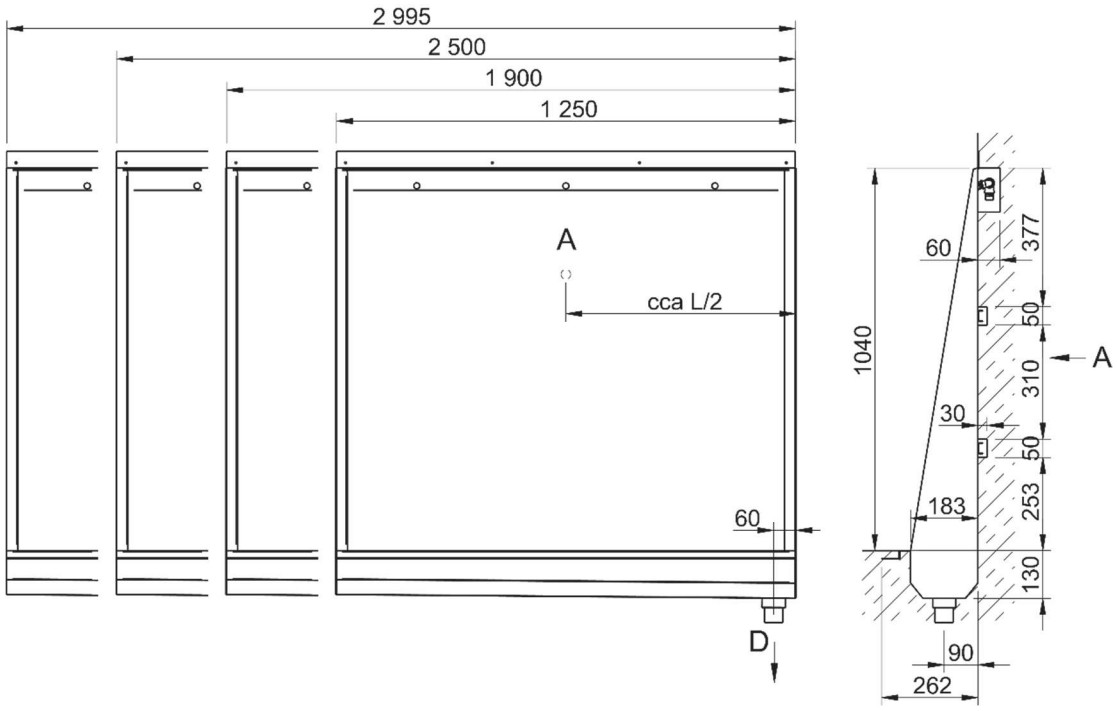

A – Water inlet

D – Water outlet