



Catalog sheet

AUZ 02 INV

Stainless steel freestanding toilet for physically disabled

The **AUZ 02 INV** is a matte finish stainless steel toilet designed for physically disabilities. It is a floor-mounted unit suitable for placement against a wall or as a freestanding fixture. Based on the standard of AUZ 02, this version features increased height and length to comply with regulations for products intended for the physically disabled. In order to increase user comfort, the seat is equipped with a durable plastic toilet seat. The unit includes a removable backrest recommended by the League for Wheelchair Users' Rights.

A freestanding toilet is suitable for locations where a standard toilet cannot be mounted to a side wall—for example, due to a thin load-bearing wall. The outlet is standardly directed into the floor (it can be used as hygienic alternative to Turkish style toilets). A back outlet configuration is available upon request.

The toilet can be equipped with an AUZ 3 INV automatic water flushing system of pressurized water with delayed flush (suitable for the physically disabled) or any flushing system with a tank. The casing is made of 1.5 mm thick stainless steel sheet, while the top load-bearing section is made of 2 mm sheet metal. An anti-vandal version (BSNZ 02) designed for the most demanding operations is also available; it is constructed from 2 mm and 3 mm thick sheet metal, features ground and rounded edges, and does not include a toilet seat. Further details can be found in the security products section.

You can find other variants of stainless steel toilets in the stainless steel toilets or stainless steel security toilets section. The toilets are made of stainless steel of class ČSN 17240 (AISI 304). Other materials on request (e.g. AISI 316).

For the treatment of stainless steel products, we recommend using Würth detergents – material preservation (order no. 0893 121 K), material cleaning (order no. 893 121 1).

Complete delivery

- Stainless steel WC
- Plastic seat
- Anchoring material
- Stainless steel backrest





Available variants

- AUZ 02 INV Stainless steel freestanding toilet for physically disabled
- AUZ 02 INV.CS Stainless steel freestanding toilet, including grey hardened seat, including black plastic seat


Technical details

- Water inlet d = 34 - 50 mm
- Min. water flow capacity 70 l/min
- Outlet d = 90 mm
- Weight 27 kg

Construction readiness requirements

- Set-up outlet into the floor accordingly the diagram d = 110 mm with rubber sleeve for pipe d = 90 mm.
- Set-up water inlet according to the diagram d = 34 - 50 mm and chosen sealing.

Diagram

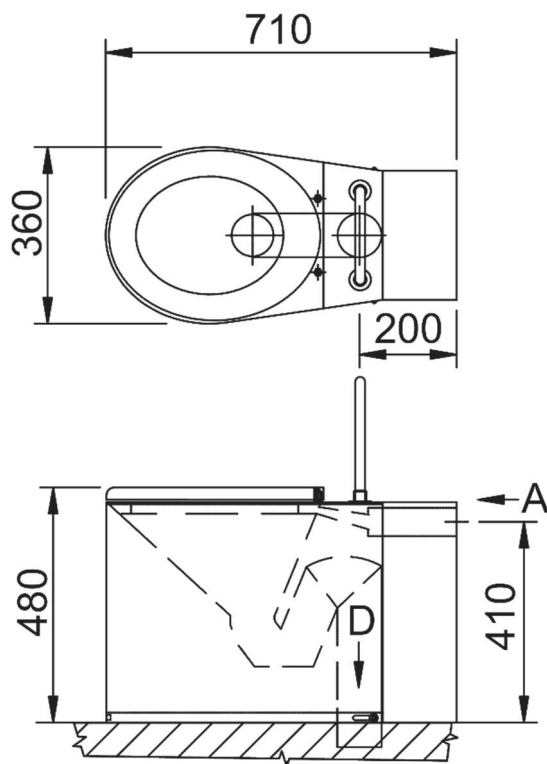

A – Water inlet

D – Outlet