



Catalog sheet

OZ 01 Stainless steel floor drainage channel

OZ 01 is an industrial stainless steel floor drainage channel with an odour trap and cover grating with 25 × 25 mm mesh. It is intended mainly for kitchens, halls, food-processing facilities and other premises without pallet truck or forklift traffic. The standard version has visible dimensions of 2000 × 227 mm; the overall dimensions including waterproofing flanges are 2043 × 270 mm.

Wastewater is discharged through an odour trap with a Ø 75 mm connection. Because of its mesh size, the cover grating is unsuitable for showers and other areas where people walk barefoot.

On request, the channel outlet can be fitted with the original debris basket for coarse solids: **KKOZ 01.V.75**

The channel and debris basket are made of stainless steel grade ČSN 17 240 (AISI 304). An AISI 316 version is available on request. Würth products are recommended for stainless steel care.



OZ 01

Complete delivery

- | | |
|----------------------------------|-------|
| • Stainless steel channel (body) | 1 pc |
| • Cover grating | 2 pcs |
| • Odour trap cover | 1 pc |
| • Debris basket (on request) | 1 pc |

Available variants

- OZ 01 Stainless steel floor drainage channel 2000 × 227 mm with grating, mesh openings 25 × 25 mm

Technical details


- | | |
|--|--|
| • Overall dimensions including flanges | 2043 × 270 mm |
| • Visible dimensions | 2000 × 227 mm |
| • Grating dimensions | 1950 × 180 mm |
| • Grating mesh size | 25 × 25 mm |
| • Waste outlet | Ø 75 mm |
| • Max. flow rate of the odour trap | Min. 50 l/min |
| • Load class | K3 – Not designed for perpendicular crossing by a pallet truck |

Construction readiness requirements

- Prepare a suitable floor opening for the channel according to the diagram.
- Prepare a waste pipe with a Ø 75 mm connection.
- The product is designed for floor installation; after installation, the top edge of the channel must be flush with the finished floor.

Diagram

OZ 01

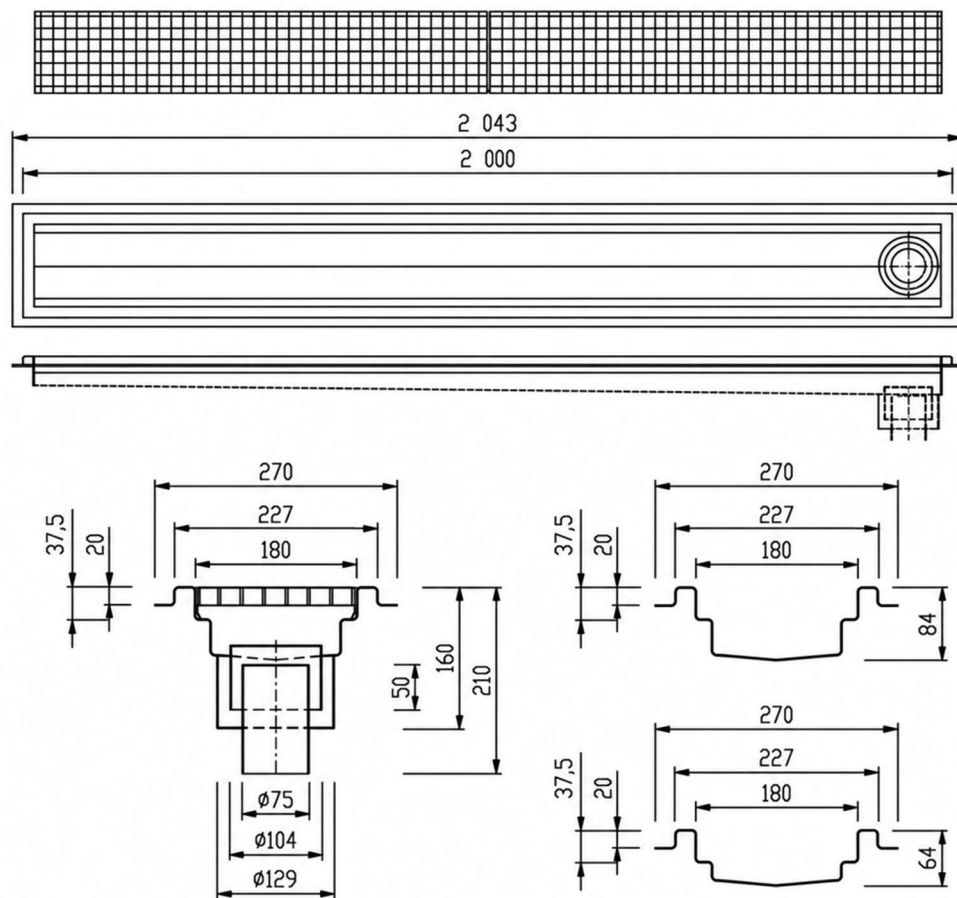

Outlet with debris basket KKOZ 01.V.75

1. Drainage channel
2. Odour trap
3. Cover grating
4. *Optional debris basket KKOZ 01.V.75

