Product datasheet

ZP 01


Wall-Mounted Stainless Steel Urinal Trough

The ZP 01 series comprises stainless steel urinal troughs of various widths designed for restrooms with a higher risk of damage. The ZP 01 is a wall-mounted variant. Standard models include water distribution piping and durable anti-vandal stainless steel nozzles. For flushing, time-controlled flushing unit COS 2 is recommended. On request, other types of flushing (e.g., sensor-operated) can be supplied.

The troughs are manufactured in four standard widths. Custom widths are available upon request. The standard design features a right-side drain (when viewed from the front); a left-side drain is available upon request. ZP 01 troughs are delivered without a cover as standard—covered versions are available on request. A stainless steel or plastic siphon can be added to the trough.

The trough is made of material ČSN 17 240 (AISI 304) with a thickness of 1.5 mm. For heavy-duty use, a highly vandal-resistant version made from 2 mm thick sheet metal is available (BSPZ 01 – see the Security Products section). On request, the trough can also be made from other materials (e.g., AISI 316).

For care of stainless steel surfaces, we recommend Würth products – conservation (item no. 0893 121 K) and cleaning (item no. 893 121 1).

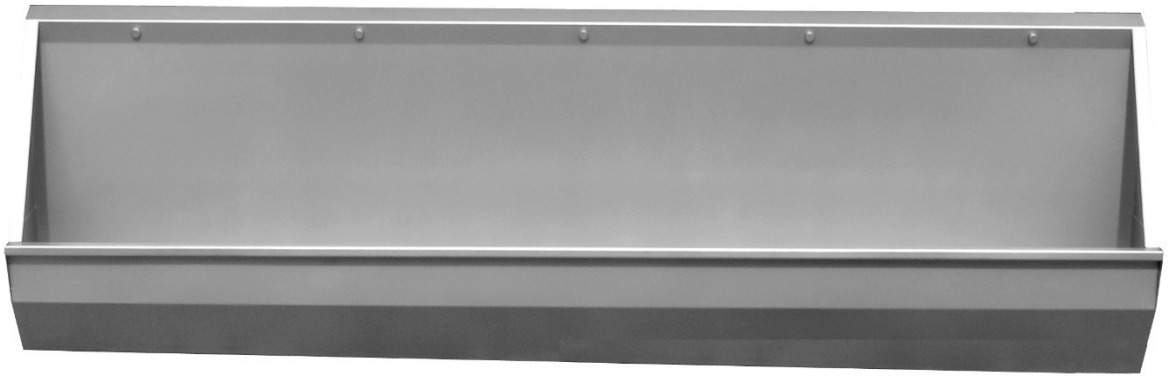

Complete Supply Includes:

- Stainless steel urinal trough with flushing and water inlet
- Basic mounting material

AZP Brno s.r.o.
U Sýpky 555, CZ-664 61 Rajhradice
tel +420 545 428 911
mob +420 602 570 068
IČ 46973150 | DIČ CZ46973150
KOS v Brně – oddíl C, vložka 7425
e-mail azp@azp.cz
www.azp.cz

Model Variants:

- ZP 01.1 – Wall-mounted stainless steel urinal trough, 1250 mm
- ZP 01.2 – Wall-mounted stainless steel urinal trough, 1900 mm
- ZP 01.3 – Wall-mounted stainless steel urinal trough, 2500 mm
- ZP 01.4 – Wall-mounted stainless steel urinal trough, 2995 mm


Technical Details:

- Water inlet: G 1/2"
- Waste outlet: 52 mm hole with pressed profile (for 5/4" or 6/4" waste trap)
- Weight: according to type
- Sheet thickness: 1.5 mm
- Material: ČSN 17 240 / AISI 304

Construction Requirements:

- Prepared water supply as per the schematic
- Prepared waste outlet, diameter 50 mm

Diagram

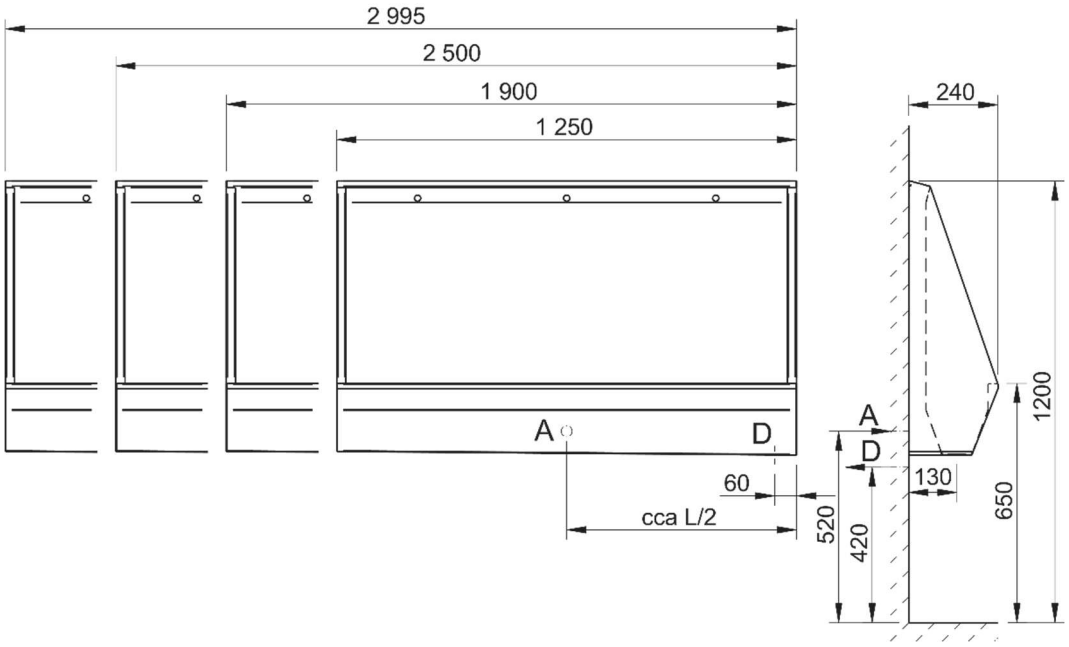

A – Water inlet
D – Waste outlet